




Version	Date	ECO #	Note
V1.0	2016.09.14		A new version of



Test requirements:

1.100% conduction test.

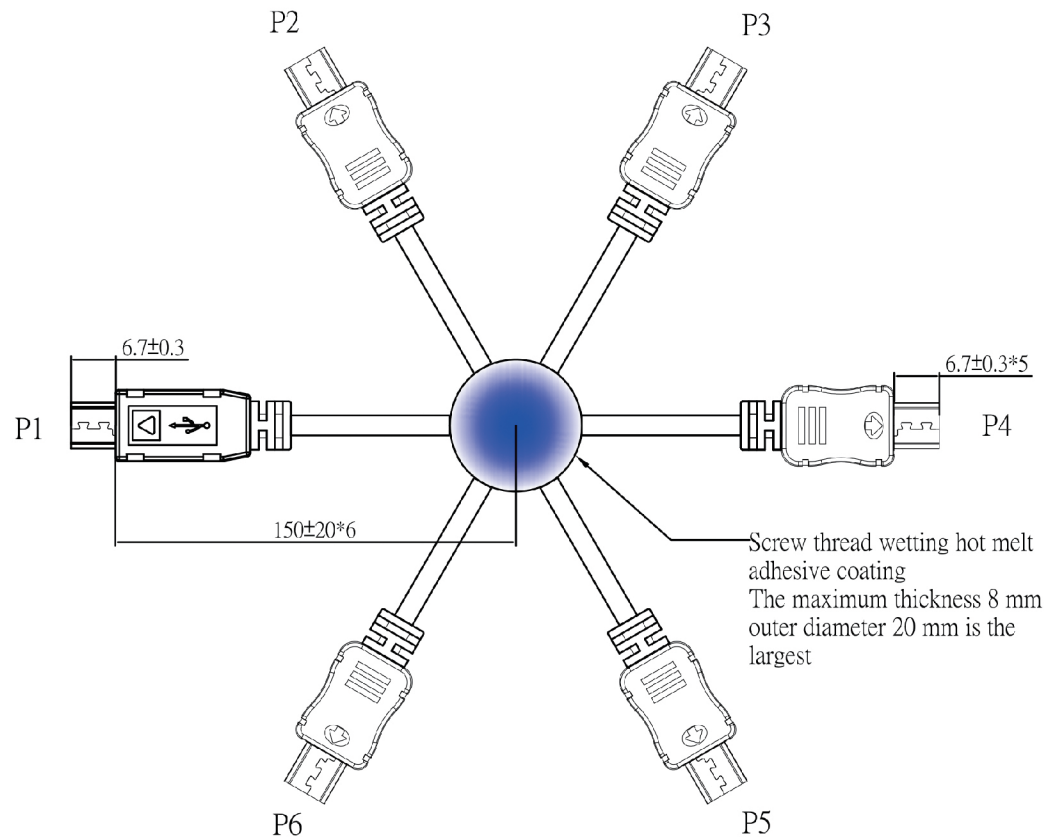

Color	P1	P2	P3	P4	P5	P6
Red Short	2	2	2	2	2	2
Black Short	7	7	7	7	7	7

NO	Name	Specifications describe	Dosage	Unit
5	Molded	PVC 45P Black	AR	KG
4	Molded	Straight up and down cover A (average 5.0 mm)	1	SET
3	Molded	Straight up and down cover B (average 5.0 mm)	5	SET
2	CONN	MICRO 7P Black rubber core/Nickel plated iron shell/Pin G/F	6	PCS
1	Wire	24AWG*2C Black PVC OD:3.0mm	150*6	MM

YI Technologies, Inc.		
 THIRD ANGLE PROJECTION -TOLERANCES- LENGTH: X±1 .XX±0.2 .XX±0.1 ANGLE: X°±1 .X°±30'	Customer Name:	See figure packaging
	Customer No:	See figure packaging
	Drawing No:	KLC-2489
	Specifications describe	Micro7Pin series connection L = 150 mm (6) black
	Unit: mm	Nuclear: reviewer: Draw diagrams:
Page: 1 OF 1		